


# EPC7004 – Rad Hard Power Transistor

 $V_{DS}, 100\text{ V}$ 
 $R_{DS(on)}, 7\text{ m}\Omega\text{ max}$ 
 $I_D, 160\text{ A}$ 

95% Pb/5% Sn Solder

Preliminary



Rad Hard eGaN® transistors have been specifically designed for critical applications in the high reliability or commercial satellite space environments. GaN transistors offer superior reliability performance in a space environment because there are no minority carriers for single event, and as a wide band semiconductor there is less displacement for protons and neutrons, and additionally there is no oxide to breakdown. These devices have exceptionally high electron mobility and a low temperature coefficient resulting in very low  $R_{DS(on)}$  values. The lateral structure of the die provides for very low gate charge ( $Q_G$ ) and extremely fast switching times. These features enable faster power supply switching frequencies resulting in higher power densities, higher efficiencies and more compact designs.

Maximum Ratings			
PARAMETER		VALUE	UNIT
$V_{DS}$	Drain-to-Source Voltage (Continuous)	100	V
	Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	120	
$I_D$	Continuous	60	A
	Pulsed (25°C, $T_{PULSE} = 300\ \mu\text{s}$ )	160	
$V_{GS}$	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
$T_J$	Operating Temperature	-55 to 150	°C
$T_{STG}$	Storage Temperature	-55 to 150	

Thermal Characteristics			
PARAMETER		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.8	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board	1.4	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	54	

Note 1:  $R_{\theta JA}$  is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board. See [https://epc-co.com/epc/documents/product-training/Appnote\\_Thermal\\_Performance\\_of\\_eGaN\\_FETs.pdf](https://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf) for details.

Static Characteristics ( $T_J = 25^\circ\text{C}$ unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$BV_{DSS}$	Drain-to-Source Voltage	$V_{GS} = 0\text{ V}, I_D = 300\ \mu\text{A}$	100			V
$I_{DSS}$	Drain-Source Leakage	$V_{GS} = 0\text{ V}, V_{DS} = 100\text{ V}$		1	300	$\mu\text{A}$
$I_{GSS}$	Gate-to-Source Forward Leakage	$V_{GS} = 5\text{ V}$		0.001	1.6	mA
	Gate-to-Source Forward Leakage <sup>#</sup>	$V_{GS} = 5\text{ V}, T_J = 125^\circ\text{C}$		0.015	3.6	
	Gate-to-Source Reverse Leakage	$V_{GS} = -4\text{ V}$		0.001	0.25	
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 5\text{ mA}$	0.8	1.4	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	$V_{GS} = 5\text{ V}, I_D = 25\text{ A}$		5	7	m $\Omega$
$V_{SD}$	Source-Drain Forward Voltage <sup>#</sup>	$I_S = 0.5\text{ A}, V_{GS} = 0\text{ V}$		1.7		V

<sup>#</sup> Defined by design. Not subject to production test.



EPC7004 eGaN® FETs are supplied only in passivated die form with solder bars  
Die Size: 4.1 x 1.6 mm

### Applications

- Space Applications: DC-DC power, motor drives, lidar, ion thrusters
- Commercial satellite EPS & avionics
- Deep space probes
- High frequency rad hard DC-DC conversion
- Rad hard motor drives

### Features

- Ultra high efficiency
- Ultra low  $R_{DS(on)}$ ,  $Q_G$ ,  $Q_{GD}$ ,  $Q_{OSS}$ , and  $Q_{RR}$
- Light weight
- Total dose
  - Rated > 1 Mrad
- Single event
  - SEE immunity for LET of 85 MeV/(mg/cm<sup>2</sup>) with  $V_{DS}$  up to 100% of rated breakdown
- Neutron
  - Maintains pre-rad specification for up to  $3 \times 10^{15}$  neutrons/cm<sup>2</sup>
- Ultra Small Footprint

### Benefits

- Superior radiation and electrical performance vs. rad hard MOSFETs: smaller, lighter, and greater radiation hardness



Dynamic Characteristics# ( $T_J = 25^\circ\text{C}$  unless otherwise stated)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$C_{ISS}$	Input Capacitance	$V_{DS} = 50\text{ V}, V_{GS} = 0\text{ V}$		817		pF
$C_{RSS}$	Reverse Transfer Capacitance			2.3		
$C_{OSS}$	Output Capacitance			485		
$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	$V_{DS} = 0\text{ to }50\text{ V}, V_{GS} = 0\text{ V}$		575		
$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			731		
$Q_G$	Total Gate Charge	$V_{DS} = 50\text{ V}, V_{GS} = 5\text{ V}, I_D = 25\text{ A}$		6.4		nC
$Q_{GS}$	Gate-to-Source Charge	$V_{DS} = 50\text{ V}, I_D = 25\text{ A}$		2.2		
$Q_{GD}$	Gate-to-Drain Charge			1.1		
$Q_{G(TH)}$	Gate Charge at Threshold			1.6		
$Q_{OSS}$	Output Charge	$V_{DS} = 50\text{ V}, V_{GS} = 0\text{ V}$		37		
$Q_{RR}$	Source-Drain Recovery Charge			0		

All measurements were done with substrate connected to source.

# Defined by design. Not subject to production test.

Note 2:  $C_{OSS(ER)}$  is a fixed capacitance that gives the same stored energy as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 to 50%  $BV_{DSS}$ .

Note 3:  $C_{OSS(TR)}$  is a fixed capacitance that gives the same charging time as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 to 50%  $BV_{DSS}$ .

Figure 1: Typical Output Characteristics at 25°C

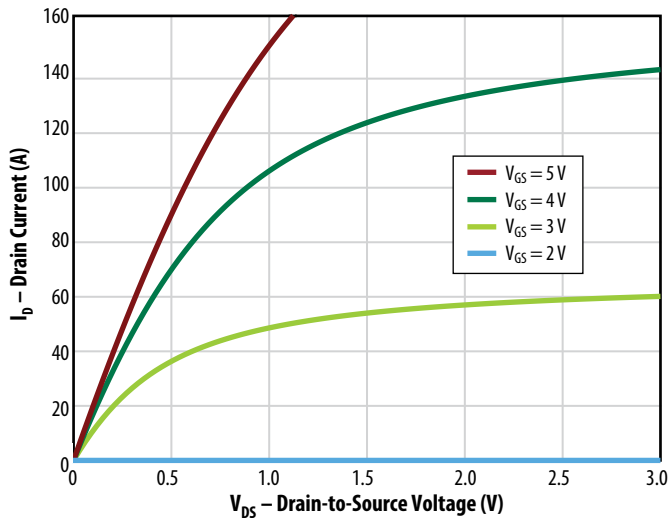


Figure 2: Typical Transfer Characteristics

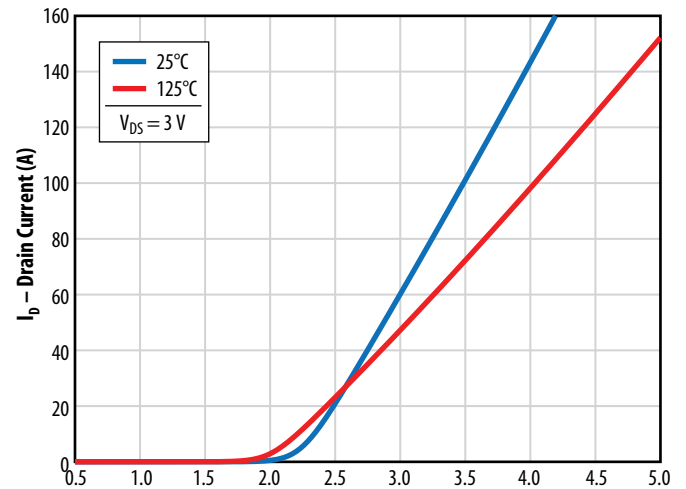


Figure 3:  $R_{DS(on)}$  vs.  $V_{GS}$  for Various Drain Currents

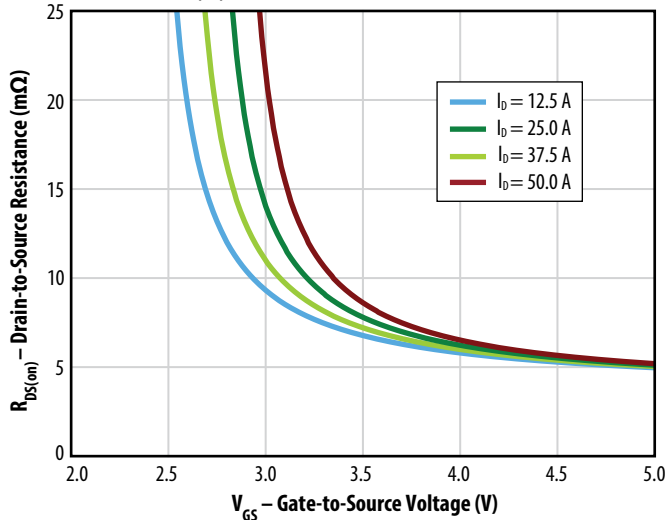


Figure 4:  $R_{DS(on)}$  vs.  $V_{GS}$  for Various Temperatures

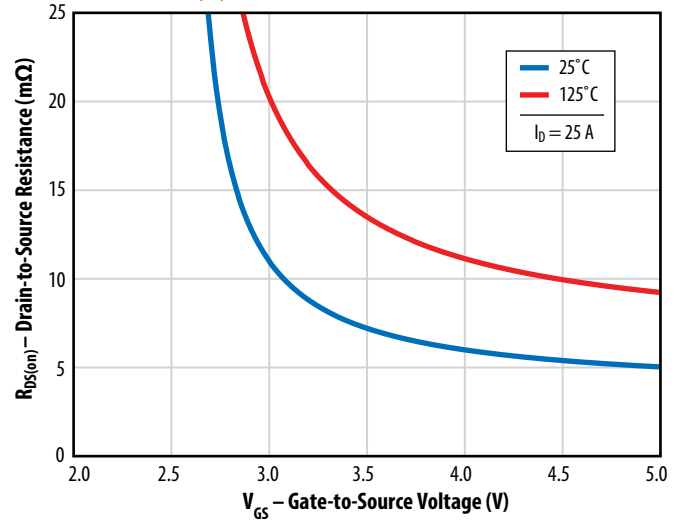


Figure 5a: Typical Capacitance (Linear Scale)

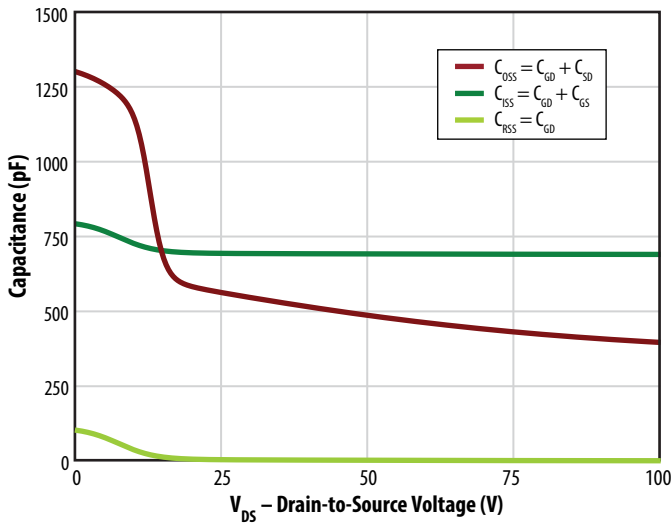


Figure 5b: Typical Capacitance (Log Scale)

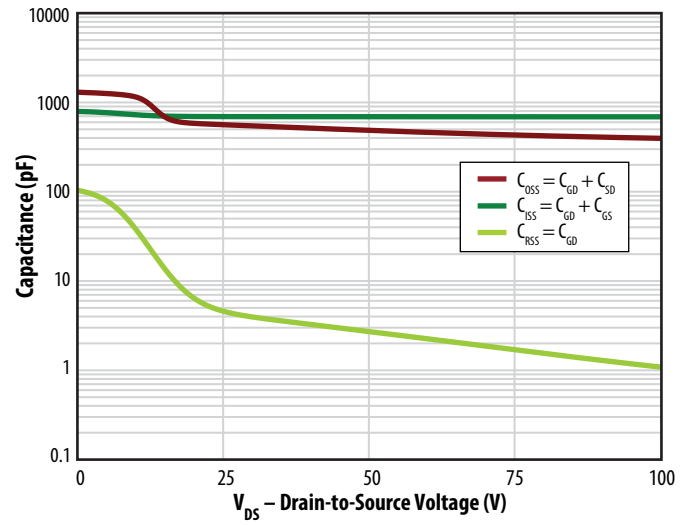


Figure 6: Typical Output Charge and  $C_{oss}$  Stored Energy

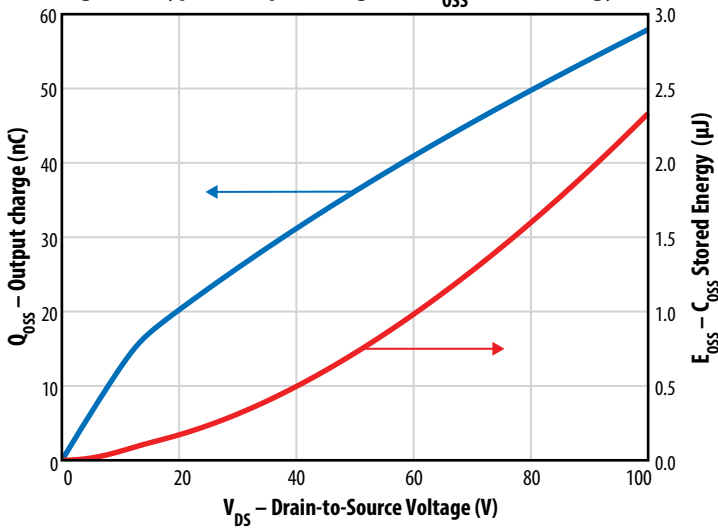


Figure 7: Typical Gate Charge

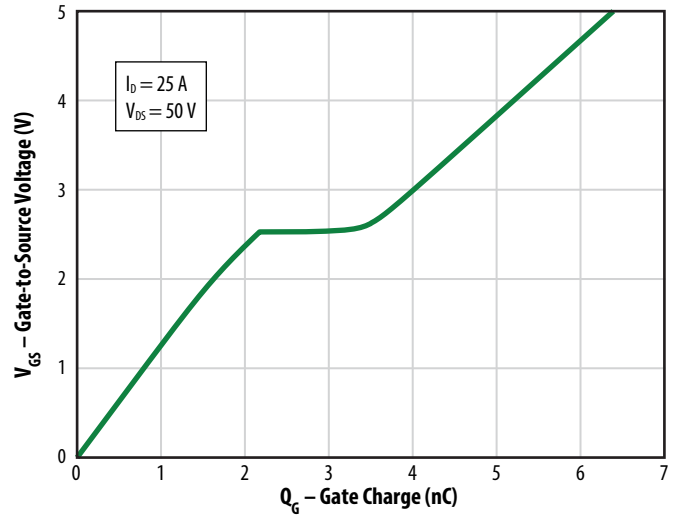


Figure 8: Reverse Drain-Source Characteristics


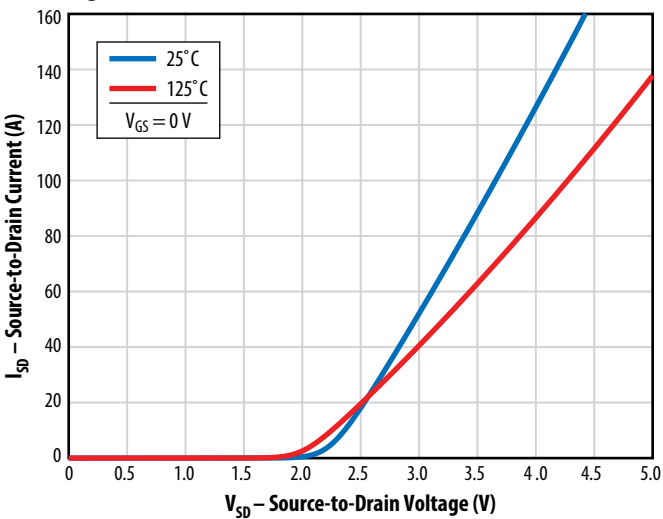


Figure 9: Normalized On-State Resistance vs. Temperature

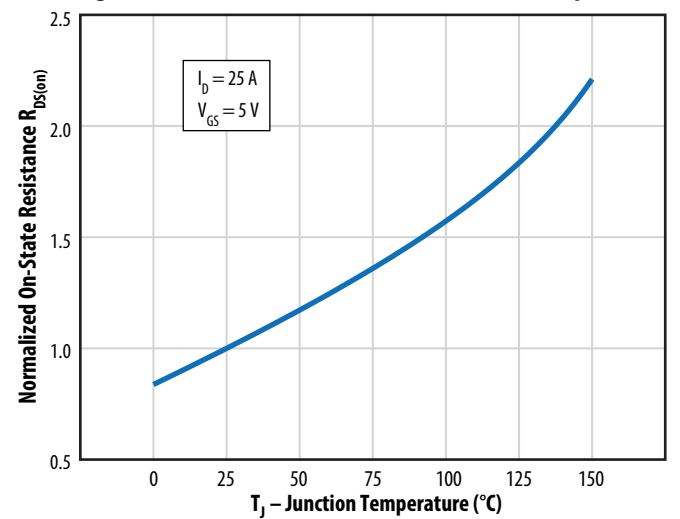

Note: Negative gate drive voltage increases the reverse drain-source voltage.  
EPC recommends 0V for OFF.

Figure 10: Normalized Threshold Voltage vs. Temperature

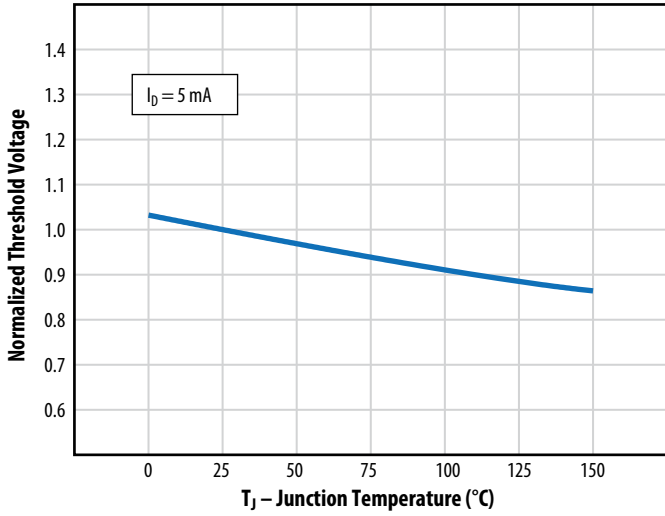


Figure 11: Safe Operating Area



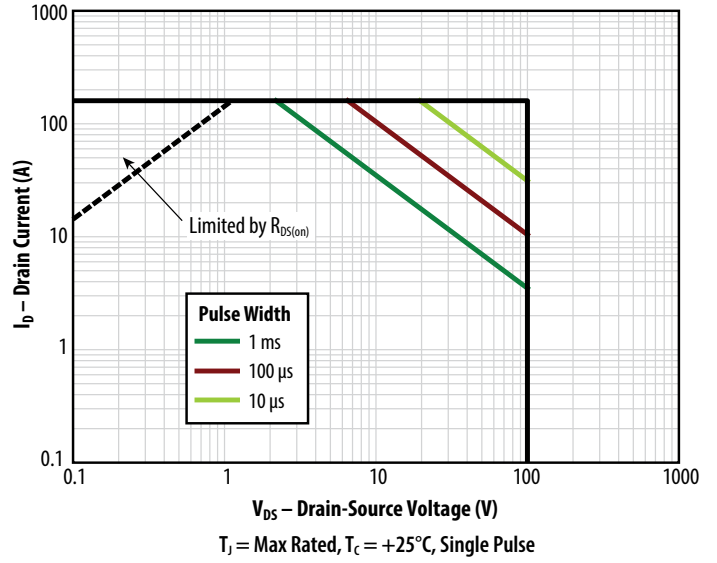


Figure 12: Transient Thermal Response Curves

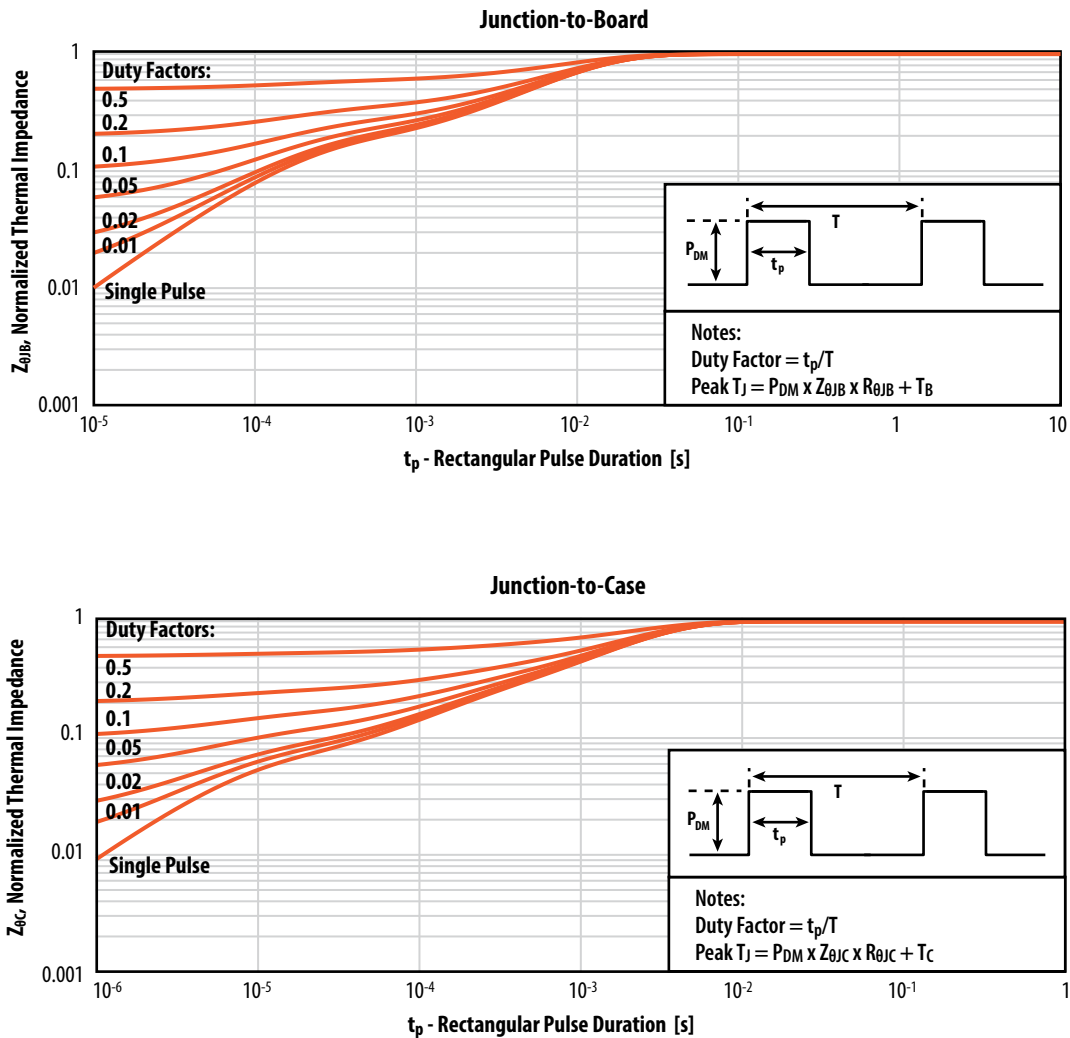

**TAPE AND REEL CONFIGURATION**

4 mm pitch, 12 mm wide tape on 7" reel

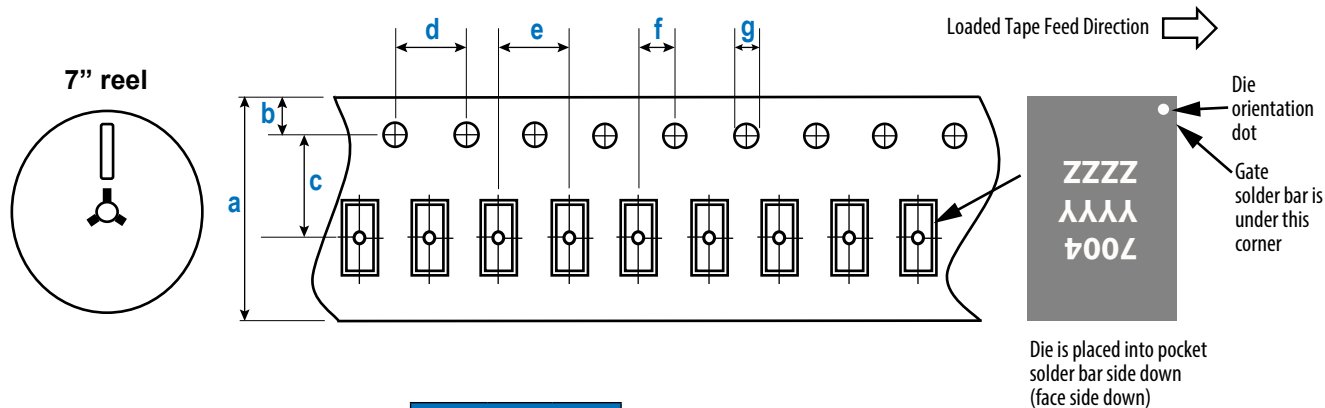


EPC7004 (Note 1)	Dimension (mm)		
	Target	MIN	MAX
<b>a</b>	12.00	11.90	12.30
<b>b</b>	1.75	1.65	1.85
<b>c (Note 2)</b>	5.50	5.45	5.55
<b>d</b>	4.00	3.90	4.10
<b>e</b>	4.00	3.90	4.10
<b>f (Note 2)</b>	2.00	1.95	2.05
<b>g</b>	1.50	1.50	1.60

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/ JEDEC industry standard.


Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.

**DIE MARKINGS**

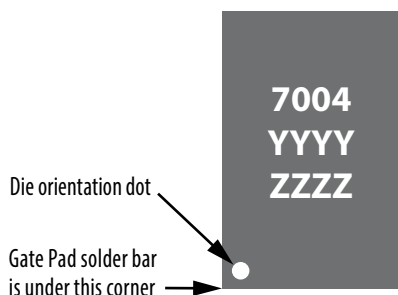


Part Number	Laser Markings		
	Part # Marking Line 1	Lot_ Date Code Marking Line 2	Lot_ Date Code Marking Line 3
EPC7004	7004	YYYY	ZZZZ

**DIE OUTLINE**  
Solder Bar View

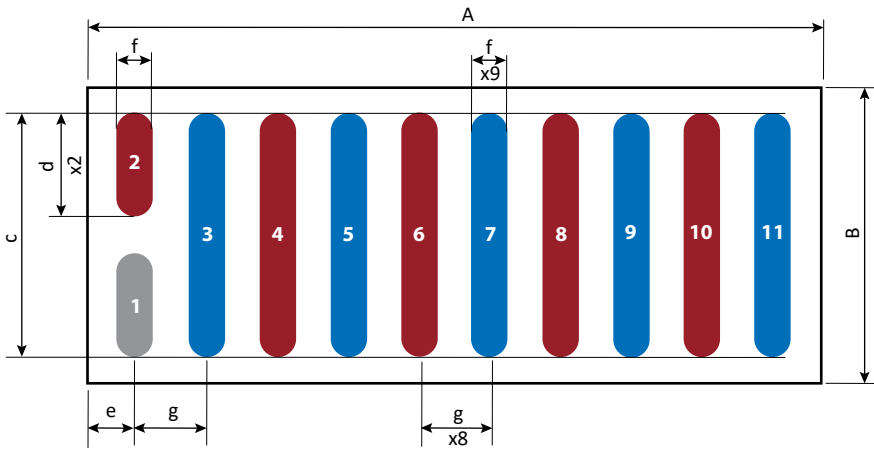

DIM	MICROMETERS		
	MIN	Nominal	MAX
A	4075	4105	4135
B	1602	1635	1662
C	1379	1382	1385
d	577	580	583
e	235	250	265
f	195	200	205
g	400	400	400


Side View

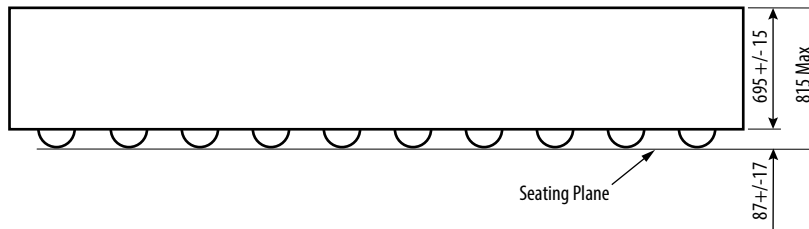

Pad 1 is Gate;  
Pads 3, 5, 7, 9, 11 are Drain;  
Pads 2, 4, 6, 8, 10 are Source

Substrate (top side) connected to Source

**RECOMMENDED LAND PATTERN**  
(measurements in μm)

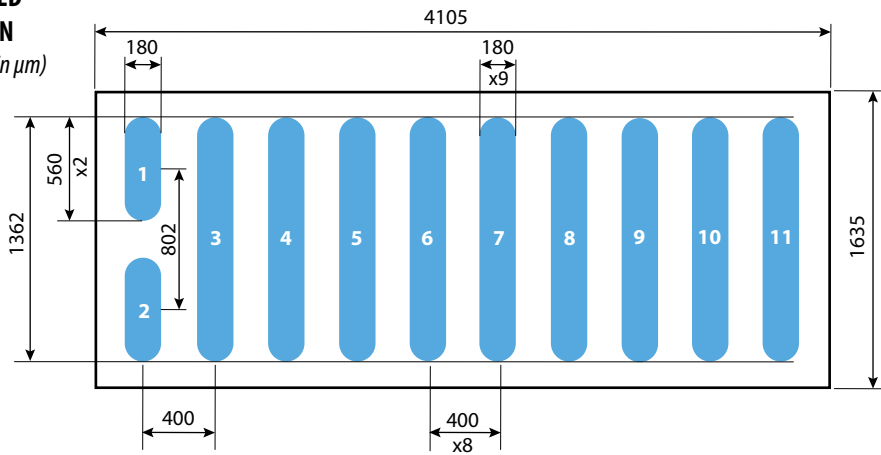

The land pattern is solder mask defined.

Pad 1 is Gate;  
Pads 3, 5, 7, 9, 11 are Drain;  
Pads 2, 4, 6, 8, 10 are Source

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.  
eGaN® is a registered trademark of Efficient Power Conversion Corporation.  
EPC Patent Listing: [epc-co.com/epc/AboutEPC/Patents.aspx](http://epc-co.com/epc/AboutEPC/Patents.aspx)

Information subject to change without notice.  
Revised June 2022